


TICO ProSpotter HD RORO Off Road Port Tractor

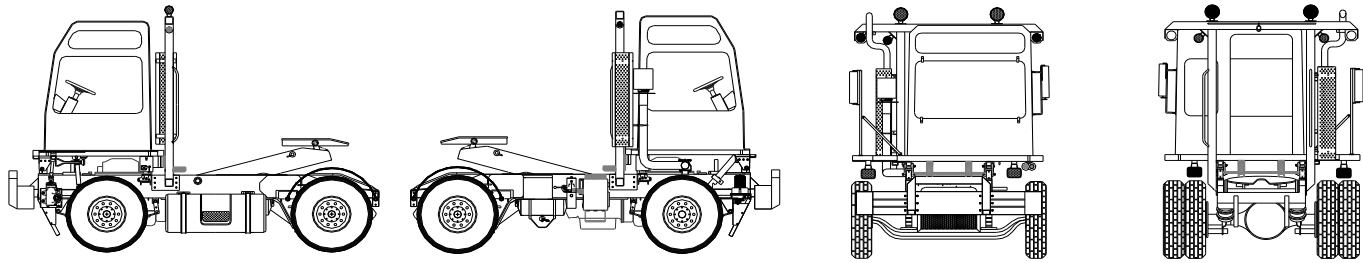

FRAME AND EQUIPMENT	AIR AND TRAILER EQUIPMENT
12" x 3" Formed Structural Steel Main Frame, Reinforced to 37 lb/ft with Reinforced Rear Closure	Nylon Chassis Hoses
* 116" Wheel Base	2 - Painted Steel Air Tanks
* Rear Mud Flaps Behind Drive Axle, Quarter Fender, Tire Brush	Manual Air Tank Drain Valves w/Wet Tank Drain on Left Side Frame Rail
Holland 100,000lb Fifth Wheel	Glad-Hands, Color Coded
Fifth Wheel Setting - 5" Fwd of C/L of Rear Axle	* 3/8" Straight Rubber Air Lines
Air Release Fifth Wheel	TIRES AND WHEELS
* Left and Right Side Access to Frame	11xR22.5 Tubeless Front Tires
* Full Width and Height Cab Protection Bar	11xR22.5 Tubeless Rear Tires
* Radiator Guard	22.5x8.25 Std Offset Hub Piloted Wheels
Back up Alarm	FUEL TANK
TRW TAS 65 Low Effort Steering Gear	* 58 Gallon Painted Steel Stair Tread ® Tank with Non-Skid on Steps
*Noise and Heat Dampening System	Tank Mounted on Left Side Frame Rail
FRONT AXLE AND EQUIPMENT	BATTERY BOX AND BUMPER
Arvin Meritor FG943 14,600 lbs	Painted Steel Battery Box w/Hinged Cover ON Right Side Frame Rail
Power Steering, TRW Gear Steering	Rubber Matting on Top and Bottom of Battery Box Interior
16" x 5" S-Cam Brakes	* Bolt-On Heavy Duty 1400lbs Counter Weight Bumper
* Automatic Slack Adjusters	
Cast Brake Drums	CAB AND EQUIPMENT
REAR AXLE AND EQUIPMENT	Fiberglass Composite Cab with Extended Head Room
Sisu SRDP (66,150 lbs) 12.28:1 Planetary	3 Upper Vista Windows- Heavy Tint
16.5" x 7" Q-Series S-Cam Brakes	Dual Air-Bag Cab Suspension
* Automatic Slack Adjusters	Electric/Hydraulic Cab Lift w/Integral Cover
Parking Brakes on Rear Brakes	Bolt-On Right Side Fender
ENGINE AND ENGINE EQUIPMENT	Bolt-on Right Side Mirror Stanchion
Cummins QSB Tier III Electronically Controlled Diesel 173 HSP	Dual West Coast Mirrors
Maximum Vehicle Speed At Rated RPM = 24.6 MPH	0-Clearance Mirror Mount (Both sides)
Air Operated Throttle w/Integral Regulator	Bostrom Baja Air-Ride Seat
Low Oil Pressure Sensor	Left Side Seat Arm Rest - Swing Up Type
High Coolant Temperature sensor	* Dual Air-Operated Transparent Rear Doors (Poly Carbonate)
Dual Group 31, Threaded Stud, Battery	Dual Sliding Side Windows
Direct Drive Fan Hub	Fixed Rear Window
Holset 15.5 CFM Air Compressor, Turbocharged	* 16" Cushioned Grip Steering Wheel with Track Ball
Fleetguard Fuel/Water Separator	Rubber Floor Mat
Fleetguard Oil Filter	40,000 BTU Fresh Air Heater
Radiator with Integral CAC & Transmission Oil Cooler in Lower Tank	Electric Horn
4" Exhaust with Extended Turn-Out	* Heater Water Shut-Off Valves at Engine
Vertical Exhaust Mounted On Cab Protection Bar	TICO Proprietary Circuit Breaker Box on Lower Left Front Inside of Cab
* Filter-Minder Mounted At Turbo	* Glove Box on Right Side of Inside of Cab
TRANSMISSION AND DRIVELINE	2 Speed Electric Windshield Wipers with Pantograph Style Arms
Allison 3500 RDS, 6-Speed Forward, 1-Speed Reverse	Air Pressure Gauge Mounted in Dash
1710 Series Driveline and U-Joints	Hour Meter- Dash Mounted
Power Take Off (PTO) Mounted on Right Side of Transmission	Keyed Ignition Mounted on Steering Column
Aluminum Flywheel Housing	Flood Lights Mounted on Cab Protection Bar Facing Rearward
Severe Service Flywheel/Transmission Mounts	Spot Light Mounted On top of Cab Protection Bar Facing Side
External Transmission Oil Filter	Speedometer
Lever Shifter	Fuel Gauge in Dash
Synthetic Oil/ 4 Year Warranty	Coolant Temperature Gauge In Dash
HYDRAULIC SYSTEM AND EQUIPMENT	Oil Pressure Gauge In Dash
* PTO Mounted 32 GPM Hydraulic Pump (Wet Spline)	Headlights, Taillights, Turn Signals
6" Power Up and Down Lift Cylinders (Dual Stage)	PAINT
Engine Mounted 8 GPM Hydraulic Pump for Steering System	Cab Paint - White
* Heavy Duty Boom	Wheels- White
Hydraulic Tank w/ Vented Cap (In Tank Filter)	Frame- Black with Zinc Primer
* Isolation Ball Valves on Hydraulic Tank	* Denotes those specifications which TICO provides as standard while other manufacturers do not offer or offer as an option.
Heavy Duty Hydraulic Service System	
Cable Controlled 5 th Wheel Raise and Lower	